

AT Acid-Test

Test to Individuate the Presence of Acidity in AC/R Systems

Description



ACID-TEST is indispensable to individuate the presence of acidity inside an AC/R System. The use of ACID-TEST is a very important and accurate step in a regular preventative maintenance to detect the presence of acid inside of lubricants.

ACID-TEST contains chemical ingredients that react when in contact with acidity changing their colour and indicating the nominal pH level of the refrigeration lubricant.



We recommend the use of **No-Acid** - the Acid Neutralizer for Refrigeration Systems - to eliminate residues of acid present in the system.

Characteristics

- Works with all lubricants (POE - ABZ - PAO - PAG - PVE - Minerale)
- Accurate result visible in few seconds
- Easy to use
- Biodegradable
- Not flammable
- Not toxic
- Not dangerous

Instruction Manual

1. Prelevate few mL of lubricant of the system.
2. Prelevate 2 mL of the lubricant with the pipette (with POE lubricants) or 4 mL of other lubricants and add to one of the 5 vials.
3. Close the flacon and shake it energycally for some seconds.
4. Observe the changing of the color:
 - If the color remains blue or becoms violet it means that the lubricant has a low pH level - necessary to correct the system.
 - If the color becoms green it means that the lubricant has a moderate pH level - treatment necessary to improve the situation of the system.
 - If the color becoms yellow it means that the lubricant has a high pH level - intense treatment necessary; Check the system.

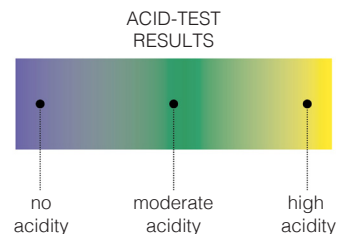

Packaging units



Kit consisting of 4 Tests + 4 Pipettes incl. instruction manual
Counter display with 12 boxes

Art.-Nr.	🗑️	♻️**
RK1349.S1	12	2160



The boxes and the counter display are manufactured with 100% recycled carton.

Hazard warnings:



Danger

Hazard statements: H315 Causes skin irritation. H318 Causes serious eye damage.

Precautionary statements: P280 Wear protective gloves and eye protection.

Contains butan-1-ol